

TECHNICAL DATA SHEET

Multi-Functional Industrial HF Battery Charger

CBHD1

General Features


- Power from 30W up to 120W
- Current from 8A to 10A
- Reduced weight and dimensions
- Available with Led on side or Led on top

Applications

- Industrial Cleaning



Battery Voltage	Battery Range (5h)	Battery Range (20h)	Charging Current	Model
12V	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	12-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	12-10
24V	40 ÷ 80 Ah	60 ÷ 105 Ah	8A	24-8
	60 ÷ 100 Ah	70 ÷ 130 Ah	10A	24-10

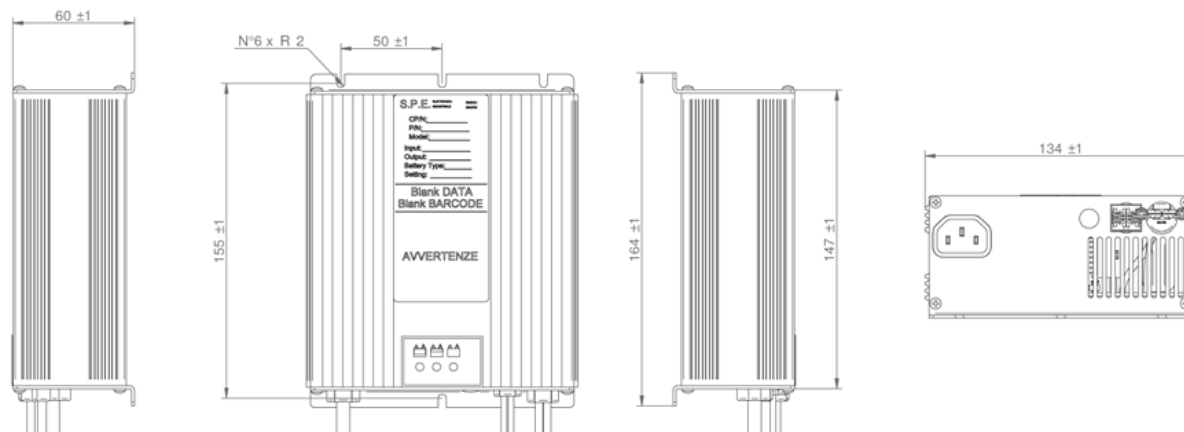

DIMENSIONS (LxWxH): 134x164x60 mm

WEIGHT: 1,80 Kg - 3.97 lbs

PROTECTION GRADE: IP30

INPUT VOLTAGE: Universal 100 ÷ 240 Vac - 50-60 Hz

*Note The above data are average values, and can be obtained within 3 charge/discharge cycles. These are not minimum values. Cell and battery designs/specifications are subject to modification without notice. Contact BSH for the latest information.